



--	--	--	--	--



	°C					
	°C					
	°C					
	°C					

FIG.1: Forward characteristics(per diode)

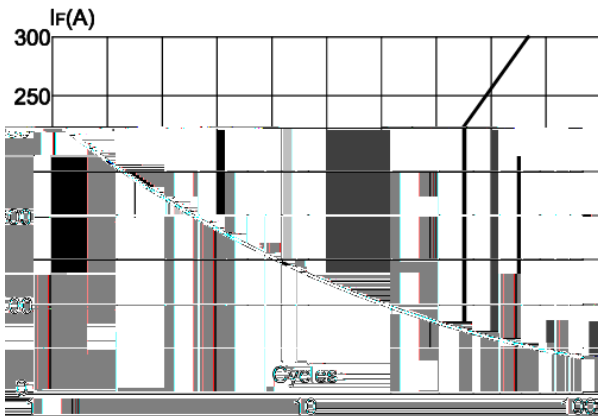


FIG.2: Peak on-state surge current

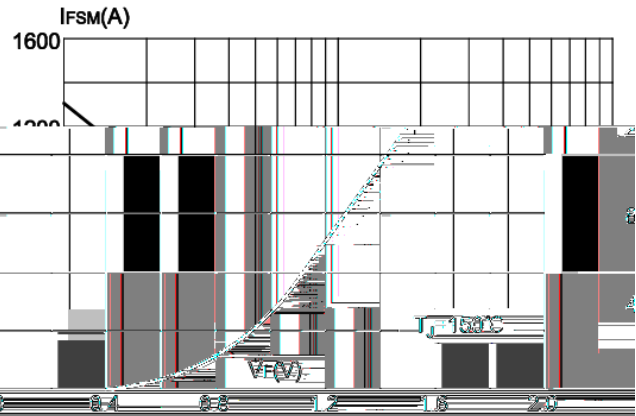


FIG.4: Maximum transient thermal impedance





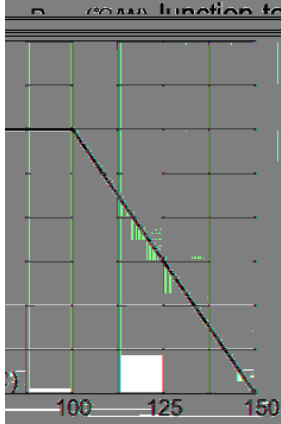


FIG.3: Forward current vs. case temperature

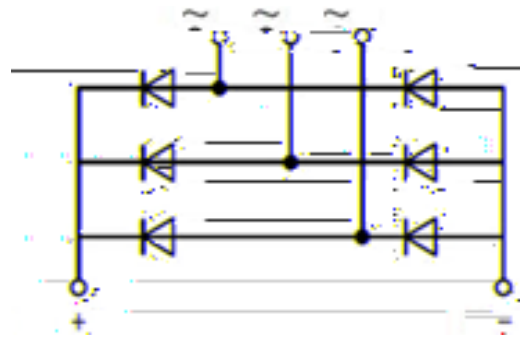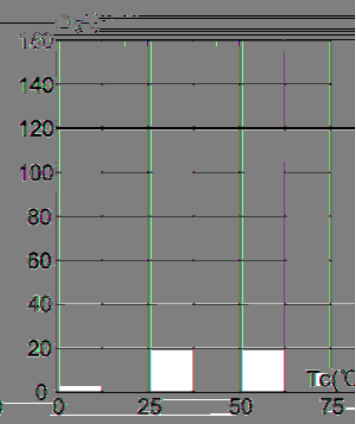

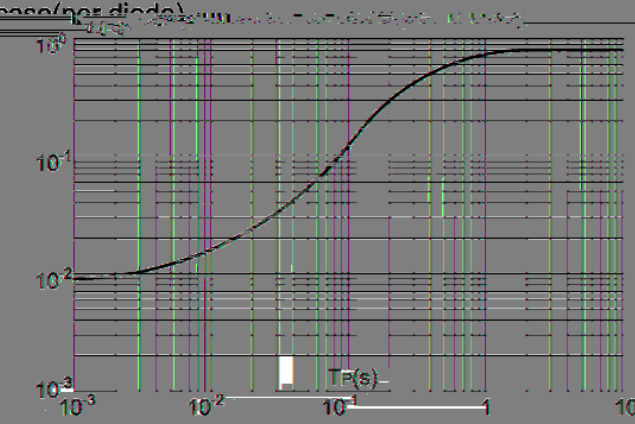

ME/CN

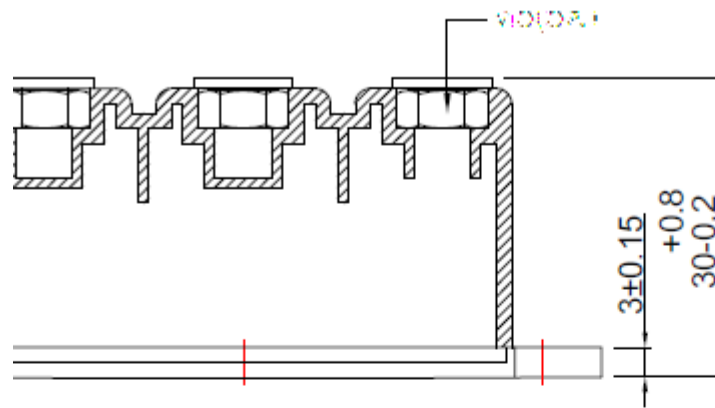