



BE) (L).


L H Yk J laa a Eg md

Ylm k

H g m l K m e Y

HY Ye l	Ydm	Mf á

hhð Yægfk

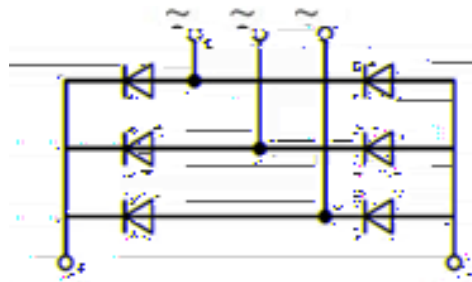

kgðm E Ypæ næ J Yf k

HY Ye l	gf áægfk	K e gd	Ydm k	Mf á
	°C			
	°C			
				°C



BE) (L).

d l aYd Y Y l ælæk

HY Ye l	gf ægfk	K e gd	Ydn k			Mf æ
			E æ &	L h &	E Yp &	
	°C					
	°C					
	°C					
	°C					

L e Yd Y Y l ælæk

HY Ye l	gf ægfk	K e gd	Ydn k			Mf æ
			E æ &	L h &	E Yp &	

G æ Å g e Yæg

na	EY cæ	HY cY	O a l	Æ f gp	H Ylgf

L ha Yd d l a Yd L e Yd Y Y l a l a k

FIG.1: Forward characteristics(per diode)

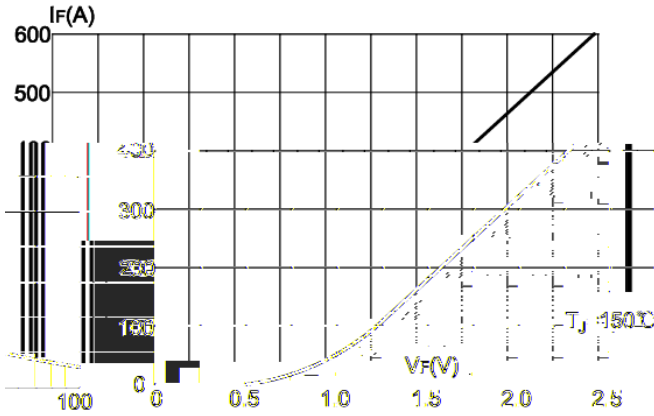


FIG.2: Peak on-state surge current

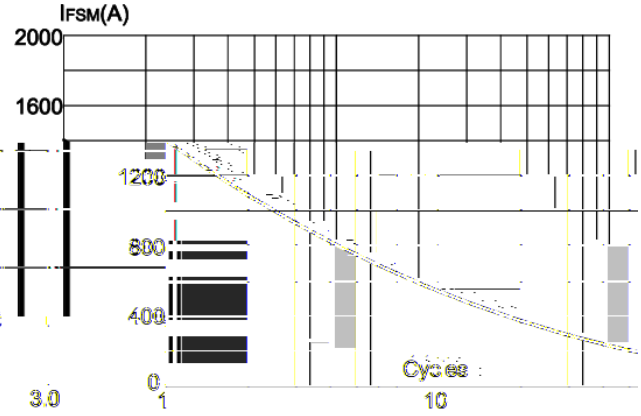


FIG.3: Reverse current characteristics (per diode)



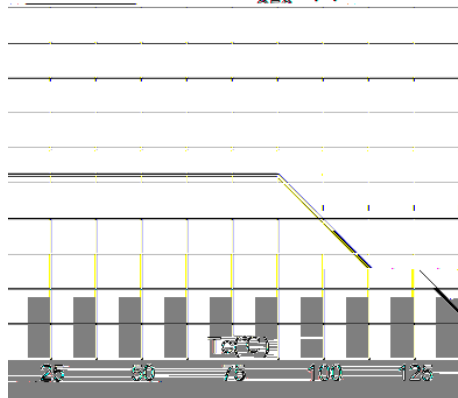


FIG.4: Thermal resistance (Rthja) vs. Power (P)

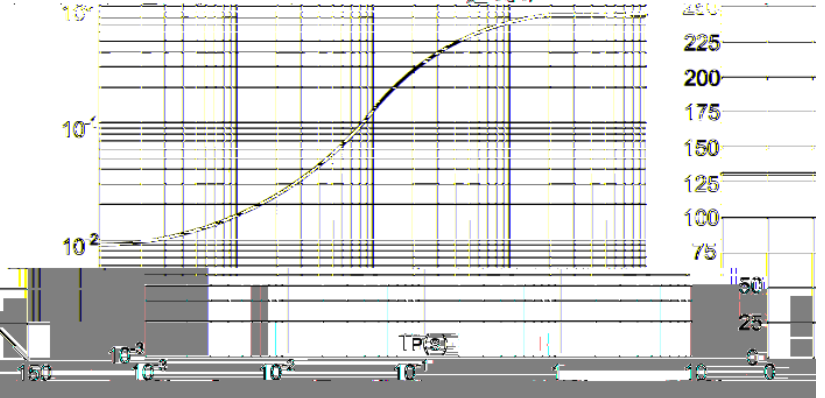

a m a Y e

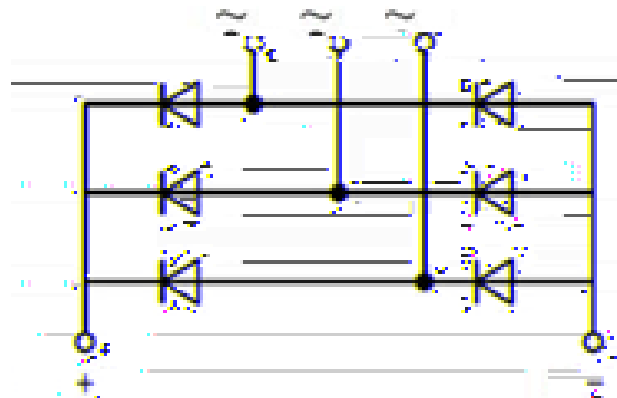

HY cY Gmldf k e e!





BE) (L).

