



H & I (J H H E KB

JKH I

&HE K J) KC C HD

& HC JH	BK	DJ

FFB JEDI

I EBJ CKC (JD I

& HC JH	ED JEDI	) OC EB	BK I	DJ
	°C			
	°C			
				°C
				°C



B JH B H JHI J I

& HC JH	ED JEDI	) OC EB	BK I			DJ
			D	OF		
	°C					
	°C					
	°C					
	°C					

HC B H JHI J I

& HC JH	ED JEDI	) OC EB	BK I			DJ
			D	OF		
						°C

H HD DEHC JED


L	HAD	& A	J	DD H E	& H HED



OF B B J H B HC B H J H J I

FIG 1: Forward characteristics(per diode)

FIG 2: Peak on-state surge current

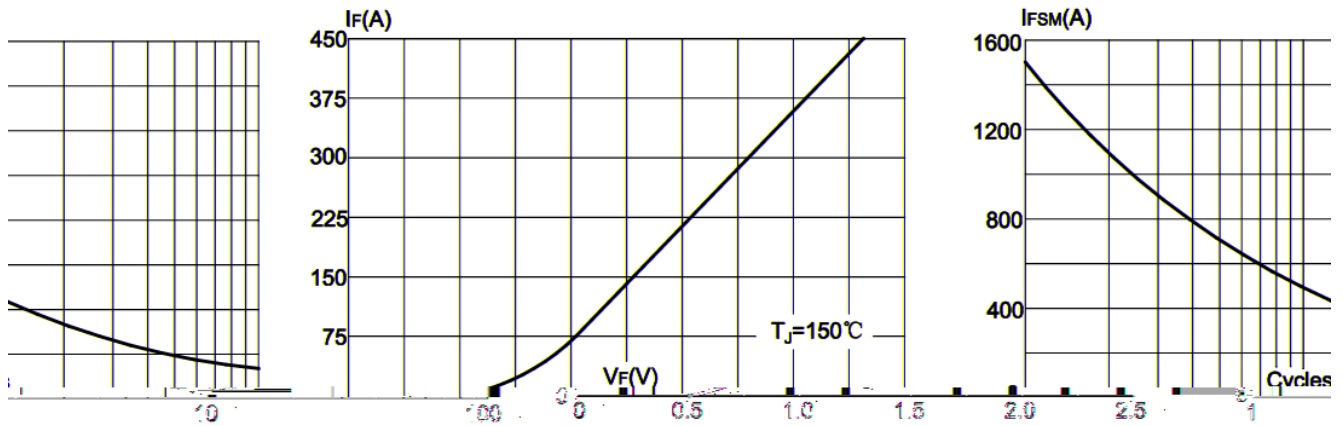


Maximum transient thermal impedance

FIG 3: Forward current vs. case temperature

FIG 4: A

HKJ HC

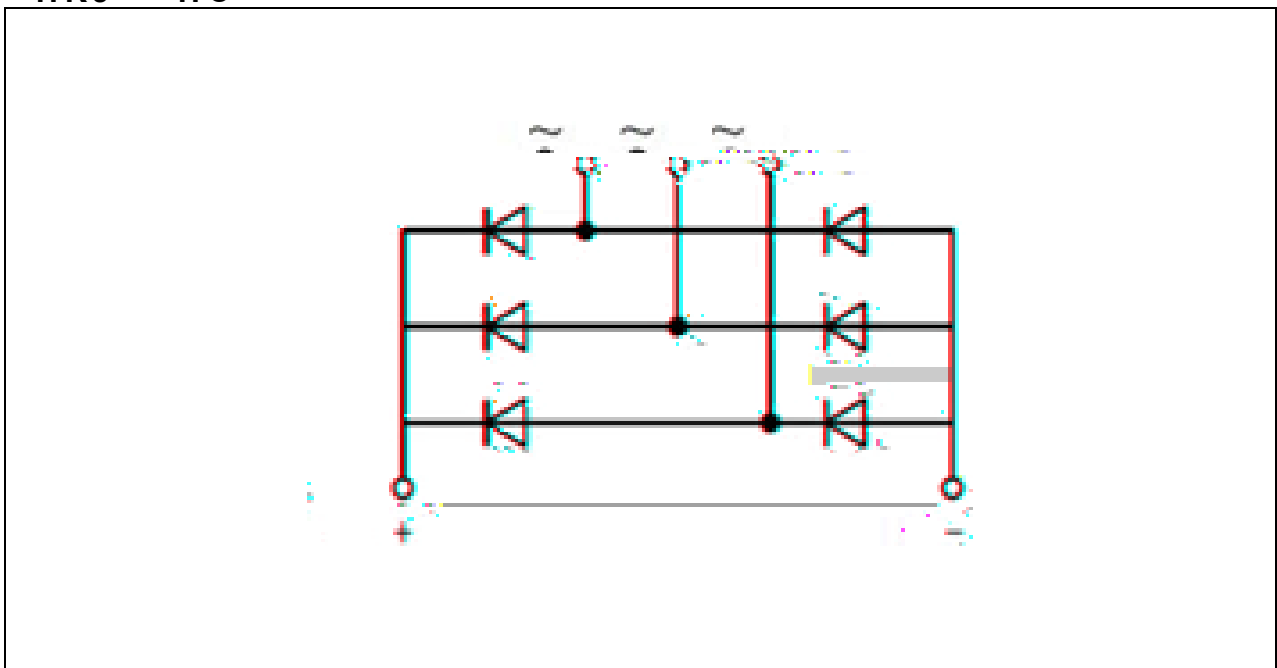

& A K.BD I CC

