



" ! ")

2

2

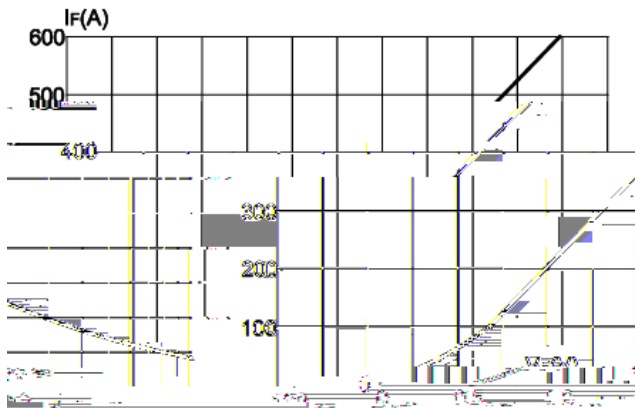
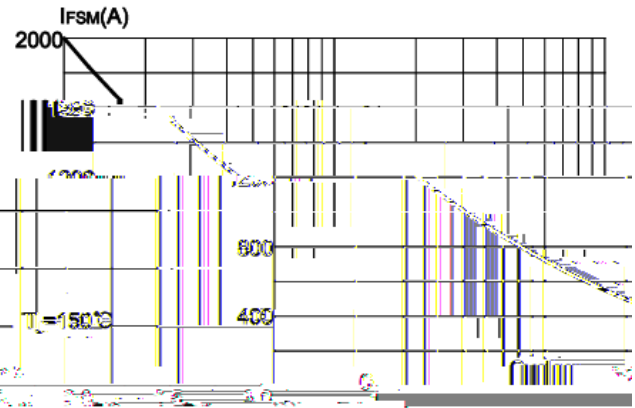
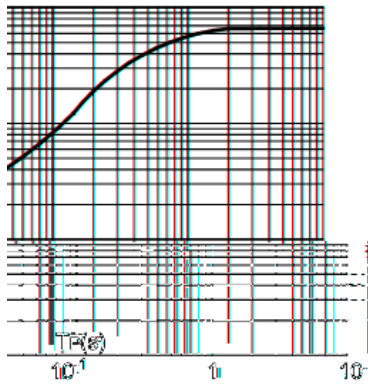
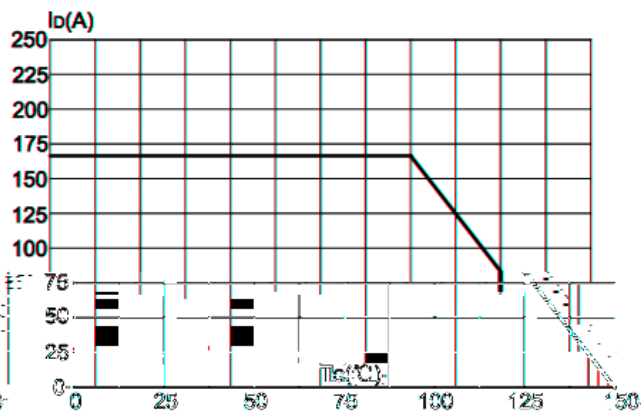
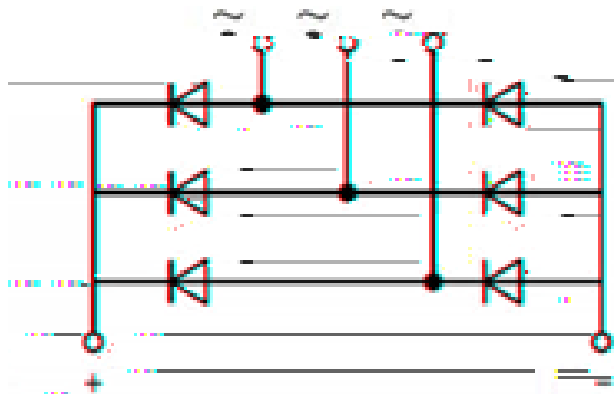
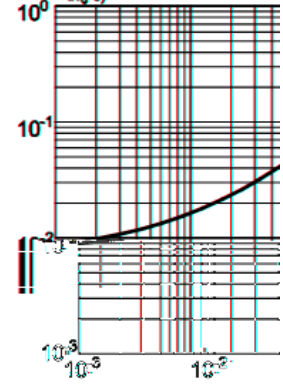
	°C			
	°C			



6

	°C					
	°C					
	°C					
	°C					

6

FIG.1: Forward characteristics(per diode)

FIG.2: Peak on-state surge current

Transient thermal impedance to-case(per diode)

FIG.3: Forward current vs. case temperature

FIG.4: Maximum transient thermal impedance






" ! "

