





☐	°C	☐				
	°C					
	°C					
	☐ °C					

FIG.1: Forward characteristics(per diode)

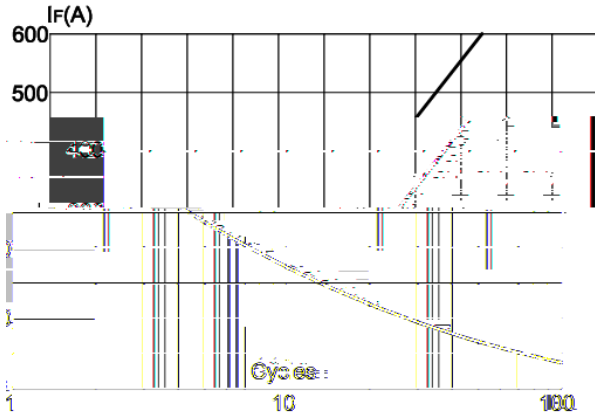


FIG.2: Peak on-state surge current

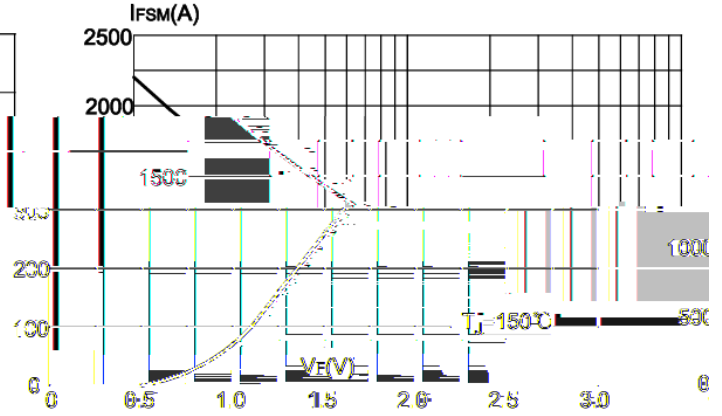


FIG.4: Maximum transient thermal impedance
 $R_{th(j-c)}$ (°C/W) Junction-to-case(per diode)

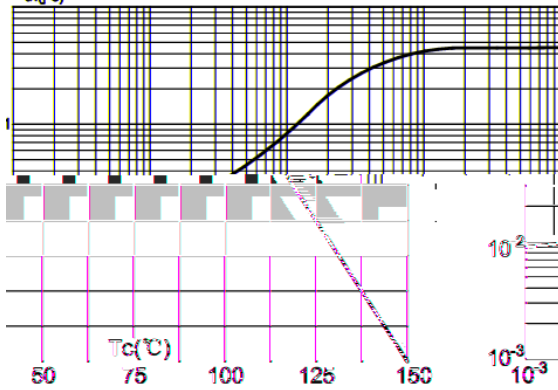


FIG.3: Forward current vs. case temperature

