



--	--	--	--	--



	°C					
	°C					
	°C					
	°C					

FIG.1: Forward characteristics(per diode)


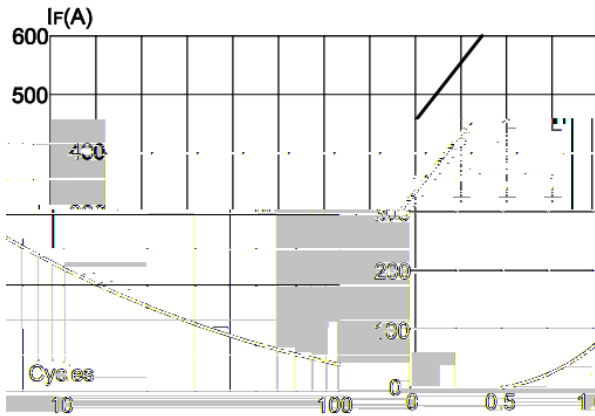


FIG.2: Peak on-state surge current

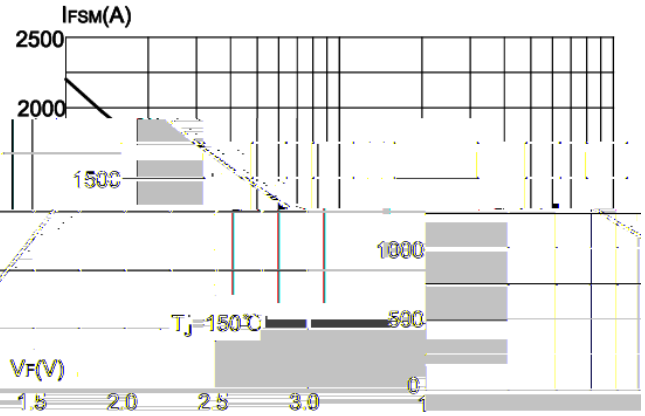

**Transient thermal impedance
Junction-to-case(per diode)**

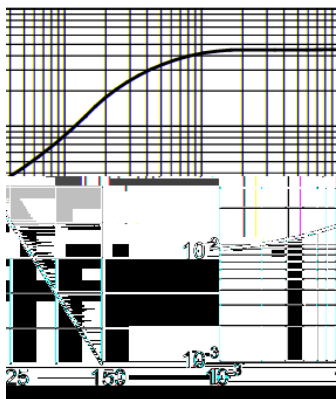


FIG.3: Forward current vs. case temperature

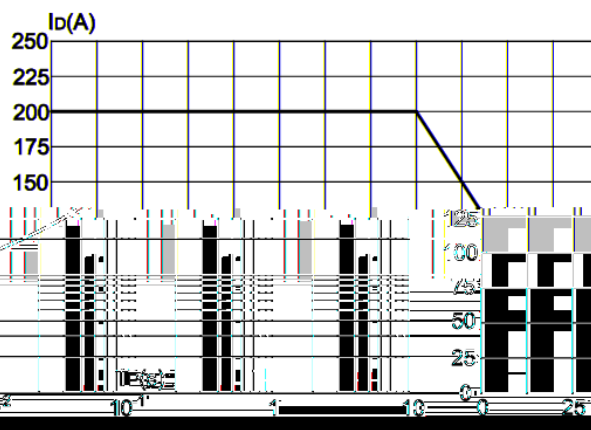


FIG.4: Maximum thermal resistance

