







FIG.1: Forward characteristics(per diode)

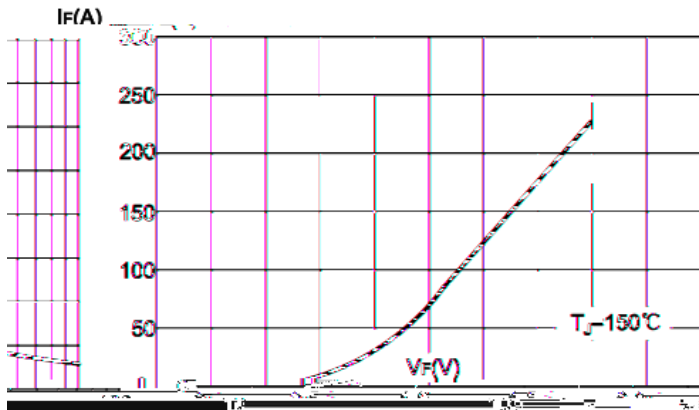


FIG.2: Peak on-state surge current

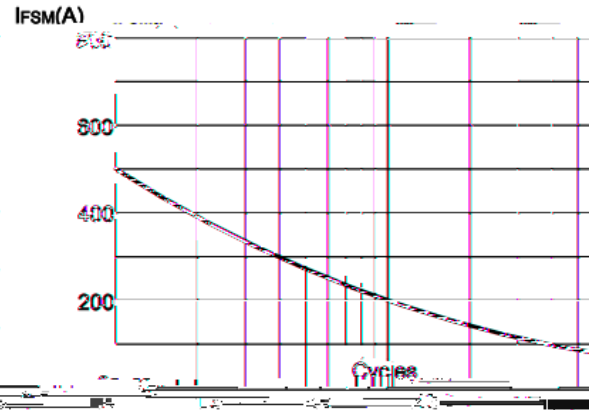


FIG.4: Maximum transient thermal impedance (RthJA) Junction-to-case(per diode)

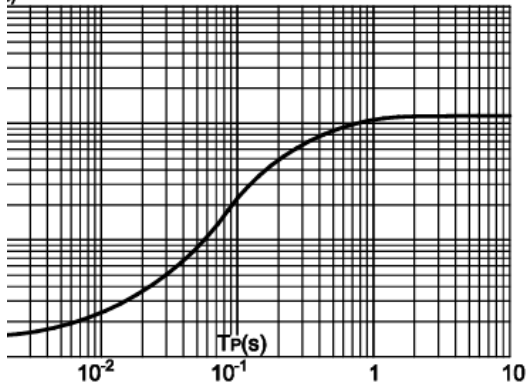


FIG.3: Forward current vs. case temperature

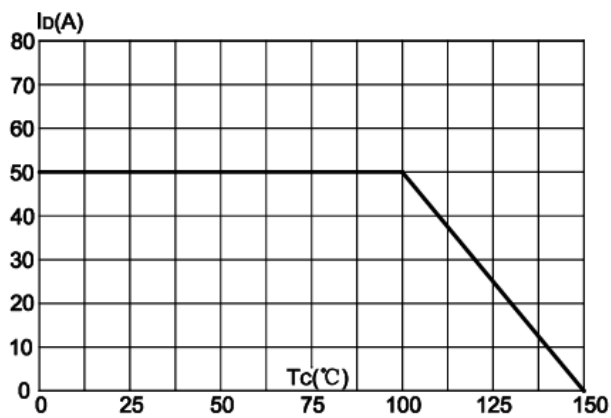


FIG.4

