





FIG.1: Forward characteristics(per diode)

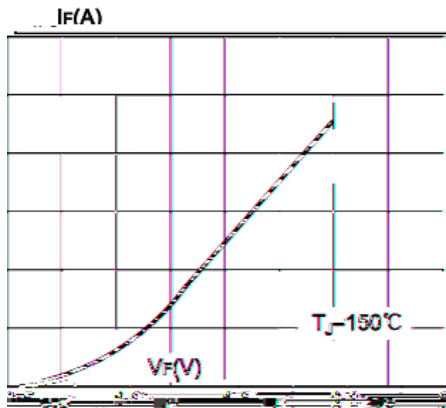


FIG.2: Peak on-state surge current



3: Forward current vs. case temperature

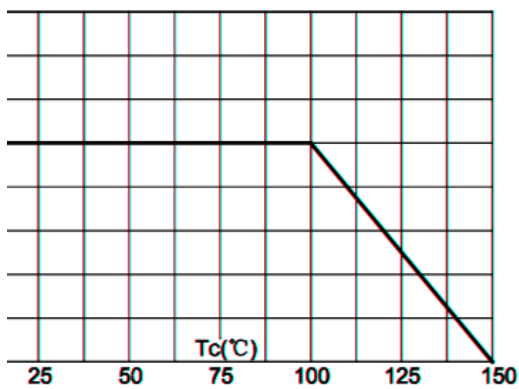


FIG.4: Maximum transient thermal impedance

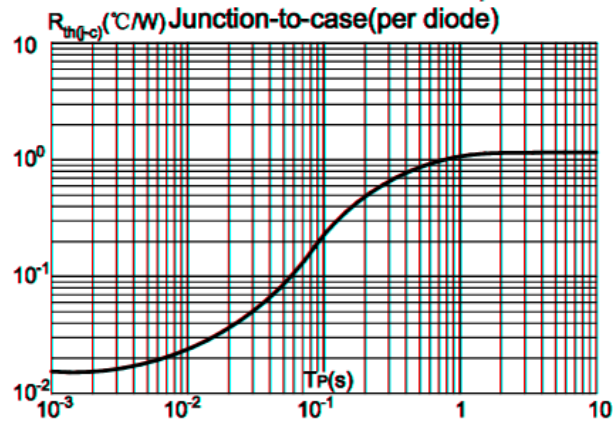


FIG.5

